



6030-1

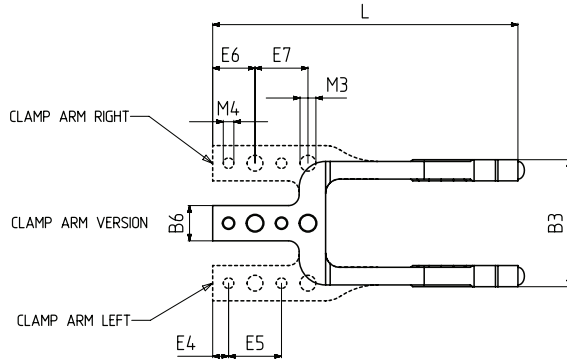

new

Power Clamp Çene
Power Clamp Jaw

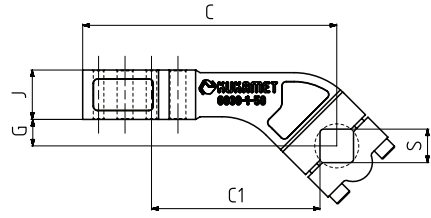

ORDERING EXAMPLE :

- 6030-1-50 (CLAMP ARM CENTER)
- 6030-1-50-R (CLAMP ARM RIGHT)
- 6030-1-50-L (CLAMP ARM LEFT)
- 6030-1-63 (CLAMP ARM CENTER)
- 6030-1-63-R (CLAMP ARM RIGHT)
- 6030-1-63-L (CLAMP ARM LEFT)

MODEL NO	AĞIRLIK (WEIGHT) (gr ±%)
6030-1 - 50	955
6030-1 - 50-R	1050
6030-1 - 50-L	1050
6030-1 - 63	1275
6030-1 - 63-R	1325
6030-1 - 63-L	1325





MODEL NO	B3	B6	C	C1	E4	E5	E6	E7	G	J	L	M3	"M4 (H7)"	S
6030-1 - 50	72	20	144	95,5	9	30	24	30	14	30	173	9	6	19
6030-1 - 50-R	72	20	144	95,5	9	30	24	30	14	30	173	9	6	19
6030-1 - 50-L	72	20	144	95,5	9	30	24	30	14	30	173	9	6	19
6030-1 - 63	86	20	144	94	9	30	24	30	14	30	177,5	9	6	22
6030-1 - 63-R	86	20	144	94	9	30	24	30	14	30	177,5	9	6	22
6030-1 - 63-L	86	20	144	94	9	30	24	30	14	30	177,5	9	6	22

150-690

ÜRÜN ADI VE KODU (PRODUCT NAME AND CODE)	MODEL NO	NOMİNAL ÇALIŞMA MESAFESİ (RATED OPERATING DISTANCE SN)	TEKRARLANABİLİRLİK (REPEATABILITY)	ORTAM SICAKLIĞI (AMBIENT TEMPERATURE)	ÇALIŞMA GERİLİMİ (OPERATING VOLTAGE)	ÇALIŞMA AKIMI (DC RATED OPERATIONAL CURRENT)	GÜÇ AÇIK GÖSTERGESİ (POWER-ON INDICATOR)	ANAHTARLAMA DURUMU (SWITCHING STATE)	AĞIRLIK (WEIGHT) (gr ±%)
TURCK NI2-Q9,5-AP6-0,1-FS4,4X3/S304	150 - 690	2mm	≤ 2 %	-25...+70 °C	10...30VDC	≤ 150 mA	YEŞİL	SARI / KIRMIZI	32



Nominal çalışma mesafesi Rated Operating Distance Sn

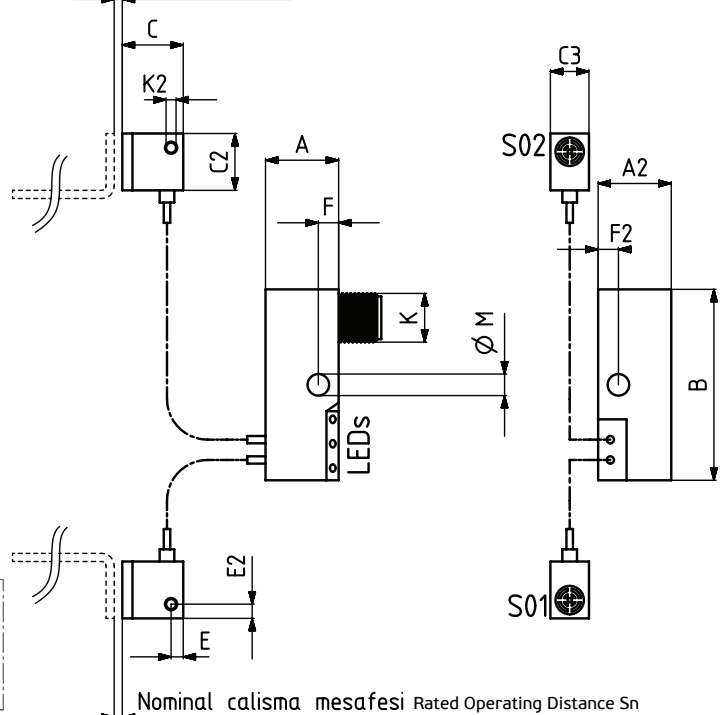

Power Clamp Sensör
Power Clamp Sensor

ÜRÜN ADI VE KODU (PRODUCT NAME AND CODE)	MODEL NO	A	A2	B	C	C2	C3	E	E2	F	F2	K	K2	M
TURCK NI2-Q9,5-AP6-0,1-FS4,4X3/S304	150 - 690	18	18	47	15	14	9,5	3	3,5	5	5	M12x1	M3	5,3